

MODEL SDA-1x16-422

Sixteen Channel RS-422 Signal Distribution Amplifier

The SDA-1x16-422 is a 16 channel distribution amplifier that can be used in any system that uses 2 wire RS-422 serial communications.

It fits in the same rack panel as the Sennetech SCT-1000 series code translators.




Front View



Rear View

Optional RMT1-3 rack mount kit can hold up to three cases

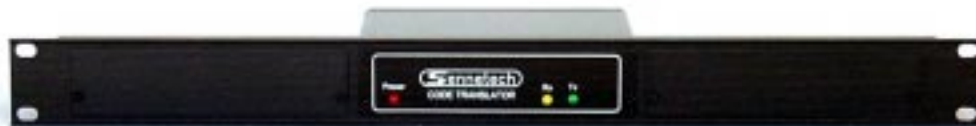

SPECIFICATIONS

SIZE:	5.57"W x 1.52H x 5.45D
WEIGHT:	1.2 lb
POWER:	9Volt to 15Volt AC or DC at 500ma
INDICATORS:	Front panel LEDs: Power and Data
DATA IN:	(1) 2-pin Screw terminal plug
DATA OUT:	(8) 4-pin Screw terminal plug

www.sennetech.net

Sennetech, Inc. 6455 W. Bath Rd. Perry, MI 48872 U.S.A. Ph (517) 675-1150 Fax(517) 675-1151