


MODEL SDA-1x16-ADM


Sixteen Channel AD Manchester Signal Distribution Amplifier

The SDA-1x16-ADM is a 16 channel distribution amplifier for AD Manchester camera control code.

It fits in the same rack panel as the Sennetech SCT-1000 series code translators.

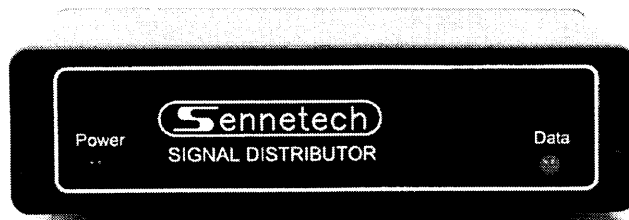

Front View

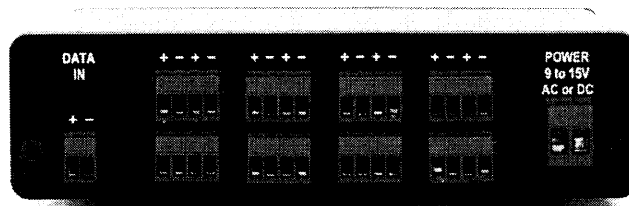

Rear View

Optional RMT1-3 rack mount kit can hold up to three cases



SPECIFICATIONS

SIZE:	5.57"W x 1.52H x 5.45D
WEIGHT:	1.2 lb
POWER:	15Volt to 24Volt AC or DC at 75ma
INDICATORS:	Front panel LEDs: Power and Data
DATA IN:	(1) 2-pin Screw terminal plug
DATA OUT:	(8) 4-pin Screw terminal plug

www.sennetech.net

Sennetech, Inc. 6455 W. Bath Rd. Perry, MI 48872 U.S.A. Ph (517) 675-1150 Fax(517) 675-1151